


# Solsum 5.0 / 6.6 / 8.0 / 8.8

New: Certified for World Bank Projects  
New: Additional Electronic Fuse

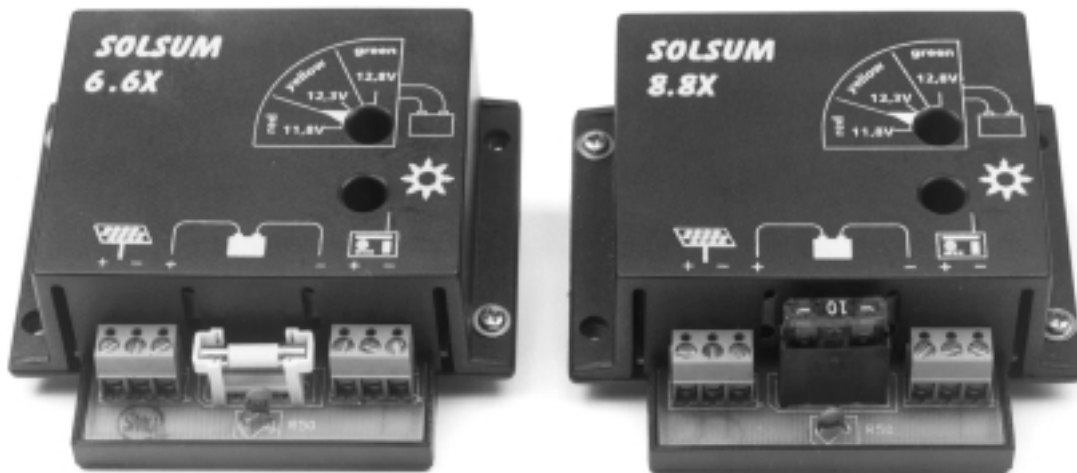

Temperature Compensated Overcharge Protection  
Temperature Compensated Cycle Charging  
Proof Against Operating Errors  
Overdischarge Protection  
Overvoltage Protection  
LED-Voltage Display  
12/24 V Systems

**Atonic**<sup>®</sup>  
*inside*

CE

Solsum<sup>®</sup> and Atonic<sup>®</sup> are registered trademarks of Steca GmbH. The LED-Display and the Hybrid controlling system are protected by the German Patent Office under numbers G 93 17 097.1 and G 93 17 338.5.

**stecca**

Our newest, and fourth, generation of solar charge controllers sets new standards in solar technology. For the first time a solar charge controller is offered in the market which is equipped with an integrated circuit (ASIC) specially designed for solar charging. This integrated circuit, called Atonic, provides a charge controller with new functions. Atonic is more than protective device for your battery, and contains the most recent and innovative technology. Overcharge protection is provided by a pulse-width-modulated shunt controller which guarantees quick and gentle charging of the battery (characteristic IV curve).

Wear-resistant MOSFET transistors are used for the overdischarge protection in this charge controllers, whereby a maintenance-free operation with an extremely long product life is ensured. Absolutely new in this price class is a cycle charging, boost charging and a temperature compensation which are regularly integrated in these charge controllers. An LED colour display gives information about voltage of the accumulator.

### Solsum Charge Controllers set new Standards in this Price and Power Class!

#### Safety Features:

- Overvoltage protection by integrated varistor
- Wrong polarity protection at Battery and Module
- Proof against operation errors
- Built-in fuse
- Electronically short circuit protected
- Voltage-display by changing colour
 

red	11,8 V
yellow to red-yellow	12,3 V
green	12,8 V


#### Charging Functions:

- Shunt regulator - fast and gentle charging
- Time-delayed overdischarge protection
- Temperature compensation by built-in sensor
- Automatic voltage adaption
- Cycle charging
- Boost charging
- Schottky diode
- MOSFET switch
- LED- display of charging function

#### Technical Data:

	Solsum 5.0*	Solsum 6.6	Solsum 8.0*	Solsum 8.8
Max. Charge Current at 50° C	5 A	6 A	8 A	8 A
Load Current at 50° C	-	6 A	-	8 A
Connection Terminal (fine/single wire)	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>
Weight	108 g	110 g	110 g	112 g
Protection	IP 22	IP 22	IP 22	IP 22
Dimensions	85x98x34 mm	85x98x34 mm	85x98x34 mm	85x98x34 mm
Ambient Temperature	-25° C bis 50° C	-25° C bis 50° C	-25° C bis 50° C	-25° C bis 50° C
System Voltage	12/24 V	12/24 V	12/24 V	12/24 V
For 24 V Systems voltages are to be doubled!				

\* No load disconnection. Only fused with 6,3 and 10 A

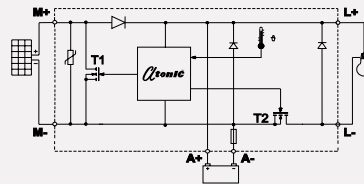

For a detailed description please see the AtonIC data sheet.

AtonIC® is a registered trademark of Steca GmbH.

\*1) Athon was an Egyptian god called: "Master of the Sun"